

# PRV

PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

PCT / SE 2004 / 0 0 1 8 1 3

## Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

*This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.*

REC'D 15 DEC 2004

WIPO

PCT

(71) Sökande Foss Analytical AB, Höganäs SE  
Applicant (s)

(21) Patentansökningsnummer 0303338-8  
Patent application number

(86) Ingivningsdatum 2003-12-11  
Date of filing

Stockholm, 2004-12-09

För Patent- och registreringsverket  
For the Patent- and Registration Office

  
Gunilla Larsson

Avgift  
Fee

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

**PATENT- OCH  
REGISTRERINGSVERKET  
SWEDEN**

Postadress/Adress  
Box 5055  
S-102 42 STOCKHOLM

Telefon/Phone  
+46 8 782 25 00  
Vx 08-782 25 00

Telex  
17978  
PATOREG S

Telefax  
+46 8 666 02 86  
08-666 02 86

Ink. t. Patent- och reg.verket

2003 -12- 1 1

1

Huvudfaxen Kassan

## Description

## Optical Reference Standard

5 The present invention relates to an optical reference standard and in particular to an optical reference standard usable in the calibration of an optical analysis instrument.

10 Optical reference standards are widely used in optical spectroscopy in order to ensure the correct performance of an analysis instrument. This is typically achieved through the comparison of measurements of optical properties of the optical reference standard performed on one instrument (so called 'slave' instrument) with similar measurements  
15 performed on the same optical reference standard by a reference instrument (so called 'master' instrument) of the same type. Moreover it is known to carry out similar comparative measurements between slave instruments or on the master instrument using the same optical reference standard  
20 for each measurement of the comparison.

When using a model, such as a regression model, derived either on the master instrument or using data from several instruments then the accuracy of the slave instrument in  
25 determining properties or constituents of a material to be analysed, such as a feed or foodstuff (including any starting or intermediate products), depends upon the accuracy with which the wavelengths and associated radiative intensities in a wavelength range particular to the material can be  
30 determined. In order to provide an accurate calibration of the instrument it is therefore important that the optical reference standard has optical characteristics in the wavelength range of interest that are close to the material to be analysed. It is also important in this respect that the  
35 reference standard has optical scattering characteristics similar to the material to be analysed.

Ink. t. Patent- och reg.verket

2003 -12- 1 1

Huvudfaxen Kassan

2

Moreover, there are often large geographical distances between instruments and attendant time lags between measurements done on the master and the slave(s). A typical instrument standardisation involves making a standardisation measurement on the master instrument, transporting the results of this and the optical reference standard to the slave where the measurements are repeated, and finally transporting the reference standard back to the master where a confirmation measurement is done and a comparison is made with the original standardisation measurement in order to ensure the validity of any associated instrument standardisation. It is therefore also important that the optical reference standard has both mechanical and temporal stability sufficient for the optical properties of the standard to remain substantially constant (that is differences less than what are expected to occur between instruments), at least between measurements by the master.

It is known from US 4,866,644 to provide a reference standard consisting of the particular feed or foodstuff to be analysed. Whilst, in the case of dry feed and foodstuffs, the so produced optical reference standard may have sufficient mechanical and temporal stability this is not the case for 'wet' feed and foodstuffs (i.e. solid products having a significant water or other edible-liquid content, such as vegetable oils, or fat content). Such wet products normally undergo rapid chemical changes and are mechanically relatively unstable. Thus, even with the careful and rapid transportation of optical reference standards consisting of such material, it is likely that changes will occur in its optical properties between measurements. This renders such optical reference standards essentially useless.

However, there presently exists a desire to provide an optical reference standard using such natural products so as to likewise provide an effective reference standard for wet feed and foodstuffs. Moreover, where analysis instruments are

Ink. t. Patent- och reg.verket

2003 -12- 1 1

Huvudfaxen Kassan

3

deployed in-line in a feed or foodstuff production process  
any contamination problems caused if the line becomes exposed  
to the optical reference standard may be significantly  
reduced if the standard comprises such natural components as  
5 are typically found in feed and food.

It is an aim of the present invention to provide an optical  
reference standard for wet products in which at least some of  
the problems associated with the known standards are  
10 alleviated.

Accordingly, there is provided an optical reference standard  
as described in and characterised by the present Claim 1. The  
matrix formed by one or both of the binder and the cereal,  
15 which in the present context includes mixtures of different  
cereal crops, can hold the water spatially fixed so as to  
provide a reference standard, particularly for wet feed or  
foodstuffs, having enhanced mechanical and temporal  
stability.

20 Preferably the cereal employed is one or more of the group  
wheat, barley, oats and maize. More preferably the cereal  
employed is oats as this has been discovered by the inventors  
to provide an optical reference standard having particularly  
25 good mechanical and temporal stability.

Usefully, the amount, the constituency and/or the composition  
of the cereal can be varied together with or independently of  
the liquid content so as to provide an optical reference  
30 standard having scattering and/or spectral response  
properties that closely match the product to be analysed  
using the analysis instrument. In this way a better  
calibration of the analysis instrument can be performed.

35 The binder employed can usefully be a gelling agent, such as  
gelatin, that can advantageously provide mechanical stability

Ink. t. Patent- och reg.verket

2003 -12- 1 1

Huvudfaxen Kassen

4

and throughout which can be dispersed some or all of the water to thereby hold it fixedly located.

5 These and other advantages will become apparent from a consideration of the following description of a preferred embodiment that is made with reference to the accompanying figures, of which:

10 Fig. 1 shows schematically an optical reference standard according to the present invention;  
Fig. 2 shows a representative absorption spectrum of the standard of Fig. 1; and  
Fig. 3 is an illustration of the temporal stability of the spectral characteristics of the standard of Fig. 1.

15 Considering now Fig. 1, an exemplary embodiment of an optical reference standard 2 is illustrated and comprises a housing 4 having a surface 6, at least a portion of which comprises a window 8 of material transparent to the wavelengths of  
20 interest. When used in the calibration of a reflectance type optical instrument then this single window 8 will be sufficient. However, when the reference 2 is employed in the calibration of a transmission type optical instrument then a second window (not shown), usually located in a surface of  
25 the housing 4 opposing the surface 6, may be included. Indeed, it will be apparent to the person skilled in the art that the configuration and composition of windows in the housing may be non-inventively adapted depending on the nature of the optical instrument to be calibrated.

30 The housing 4 is filled with a reference material 10 composed to provide the desired optical properties, as is exemplified below. Generally the reference material 10 consists of a cereal 12 and binder 14 matrix by which is held, spatially  
35 fixed, a desired amount of the appropriate, preferably edible, liquid or liquids. The cereal 12 is illustrated as comprising coarse particles but may be ground to any degree

Ink. t. Patent- och reg.verket

2003 -12- 1 1

Huvudfaxen Kassa

5

and may consist of one or more cereal crop types, particularly so as to adapt the optical scattering properties of the optical reference standard 2.

- 5 A formulation of the reference material 10, particularly adapted to substantially match the optical properties of pulped sugar beet, will now be described by way of example only.
- 10 Pulped sugar beet largely consists of water, starch, sugars and some structural polysaccharides. The material is unstable both chemically and spectrally because crushing, cutting and/or pulping of the beet releases enzymes that rapidly start to break down the starch and sugar. In
- 15 addition, oxidation also initiates changes. For these reasons beet pulp is not a suitable candidate as a standardisation medium. However there exists strong commercial drivers for the accurate and reproducible analysis of one or more quality parameters of sugar beet and hence
- 20 there is a need for an optical reference by which to standardise slave instruments to match the response of a master instrument, employed to derive a sugar beet calibration.
- 25 In this example the reference material 10, consists of a mixture of gelatin binder 14 with oatmeal 12. The optical reference standard 2 formed using oatmeal has been found by the inventors to have good temporal and mechanical stability as well as suitable optical properties but barley and wheat
- 30 or a mixture of some or all of these cereal crops can also be used to advantage.
- A mixture of 20g of gelatin in 100ml of water was made up by adding the gelatin to heated water and allowing to cool. 30g
- 35 of oatmeal was added to 50ml of the gelatin solution and blended using a mechanical food blender. This was allowed to cold set to form the reference material 10.

Ink. t. Patent- och reg.verket

2003 -12- 1 1

Huvudfaxen Kassar

6

A relatively high concentration of oatmeal has been determined experimentally to provide a good match to the optical properties of the beet. Typically this concentration should be in the region of 20 to 30 g of oatmeal per 50ml of the gelatin solution in order to match the absorption spectrum of sugar beet. Of course this concentration may be adjusted through experimental trials, comparing the spectral response of the standard 2, employing the material 10, with that of the target material. The concentration of gelatin in water can be likewise adapted to provide a required mechanical and temporal stability.

The optical absorption spectrum in a wavelength range of interest of the optical reference standard 2, formed using the optical reference material 10 is illustrated by a line 16 in Fig. 2. Spectra obtained from actual sugar beet samples in the same wavelength range are also illustrated in Fig. 2 by lines 18 that illustrate the typical intensity variations in the absorption spectra of different sugar beet samples.

The temporal stability of the reference standard 2 is illustrated in Fig. 3 in which spectra obtained from the same standard 2, using the same optical measurement instrument, some 16 days apart are shown. A line 20 represents an initial spectrum that was obtained two days after the manufacture of the reference material 10 and a line 22 represents that spectrum obtained 16 days later. As can be seen by the person skilled in the art, the standard 2 is sufficiently stable spectrally for it to be employed as an optical reference standard.

Whilst the invention has been described with reference to oats other cereal crops, such as maize corn, rice, barley and wheat for example may substitute or be added. Other gelling agents, such as agar, starch, pectin and cellulose, that are capable of retaining liquid in a physically stable form may

Ink. t. Patent- och reg.verket

2003 -12- 1 1

Huvudfaxen Kassan

7

substitute for the gelatin without departing from the invention as claimed.

Moreover, other components may be added in order to achieve  
5 desired spectral properties of the standard; for example  
colouring agents (illustrated in Fig. 1 by particles (26))  
such as carbon black, cellulose or a colouring (preferably  
edible) may be added to vary the optical density; starch or  
sugars may be added to achieve the desired spectral response;  
10 or other liquids, such as vegetable oils, may substitute for  
or be used in conjunction with water whilst remaining within  
the scope of the invention as claimed.

0  
1  
2  
3  
4  
5  
6  
7  
8  
9  
0



2003 -12- 1 1

Huvudfaxen Kassar

8

## Claims

1. An optical reference standard (2) comprising an optical reference material (10) characterised in that the optical reference material (10) comprises a binder (14) and a cereal (12) formed into a matrix to fixedly hold an amount of water, the reference material (10) being constituted with the binder (14), the cereal (12) and the water present in amounts to provide the reference standard (2) with desired spectral, mechanical and temporal characteristics.
2. An optical reference standard as claimed in Claim 1 characterised in that the cereal (12) is selected from the group of one or more of oats, barley and wheat.
3. An optical reference standard as claimed in Claim 2 characterised in that the cereal (12) is oats in the form of one or other of oatmeal and oat flour.
4. An optical reference standard as claimed in any preceding claim characterised in that the binder (14) is a gelling agent.
5. An optical reference standard as claimed in any preceding claim characterised in that the optical reference material (10) further comprises one or more components (26) selected to vary its optical density.

Ink. t. Patent- och reg.verket

2003 -12- 1 1

Huvudfaxen Kassa


9


Abstract

Optical Reference Standard

5 An optical reference standard (2) for wet foodstuffs  
includes an optical reference material (10) comprising a  
binder (14) and a cereal (12) formed into a matrix to  
fixedly hold an amount of water. The reference material  
(10) being constituted with the binder (14), the cereal  
10 (12) and the water present in amounts to provide the  
reference standard (2) with desired spectral, mechanical  
and temporal characteristics.

Fig. 1



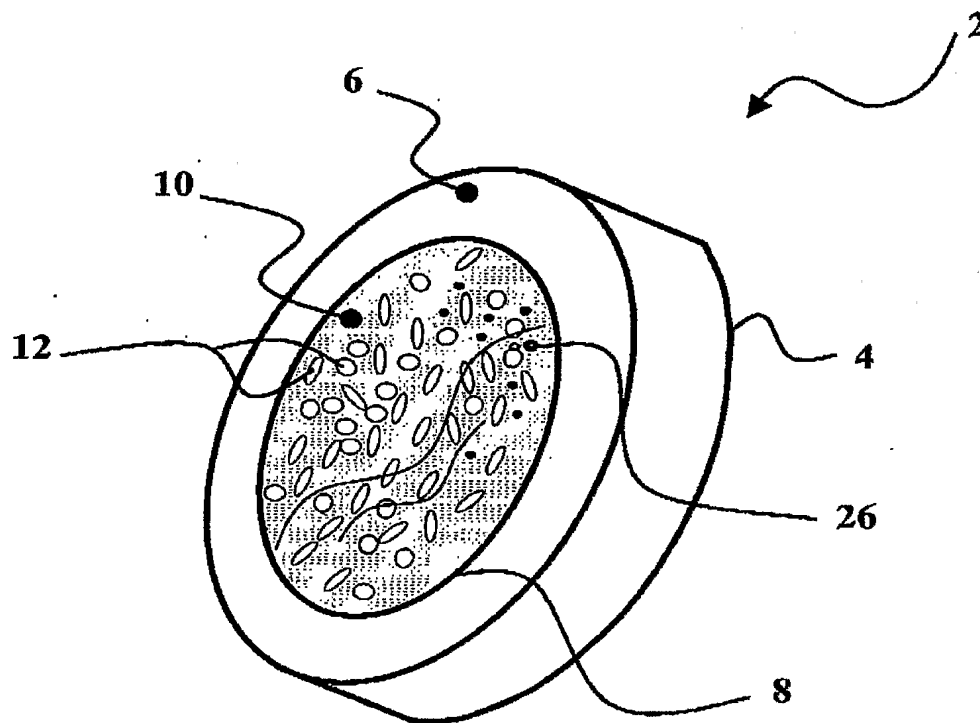


**Fig. 1**

Ink. t. Patent- och reg.verket


2003 -12- 1 1

2/3

Huvudfaxen Kassen

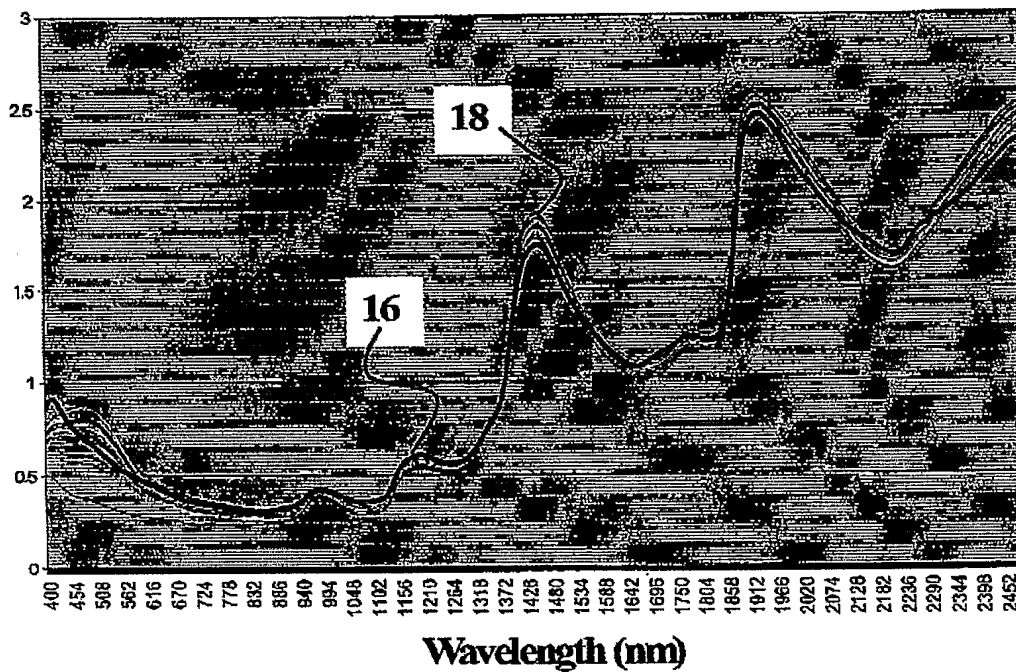

**Fig.2**

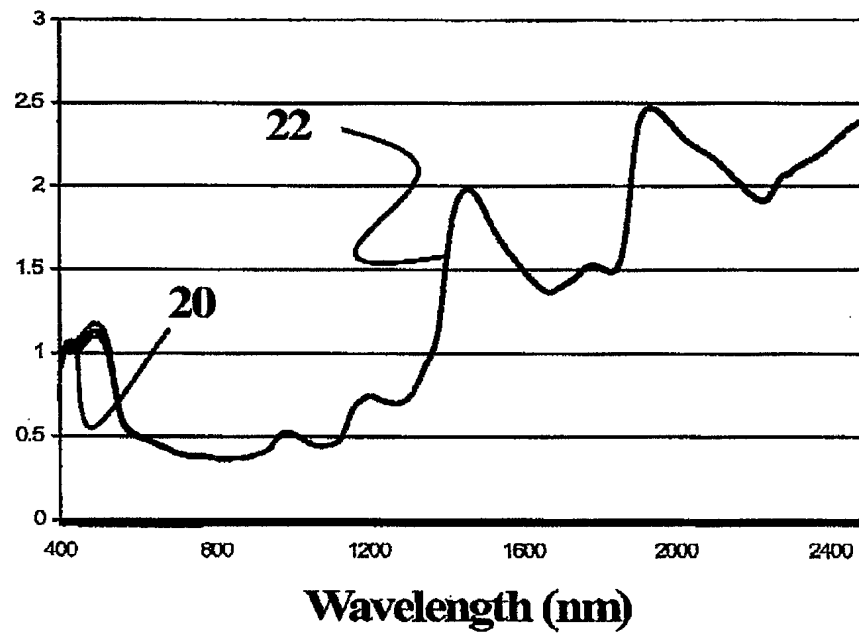

**Fig. 3**

